


RUBBER BLOCK CHAINS

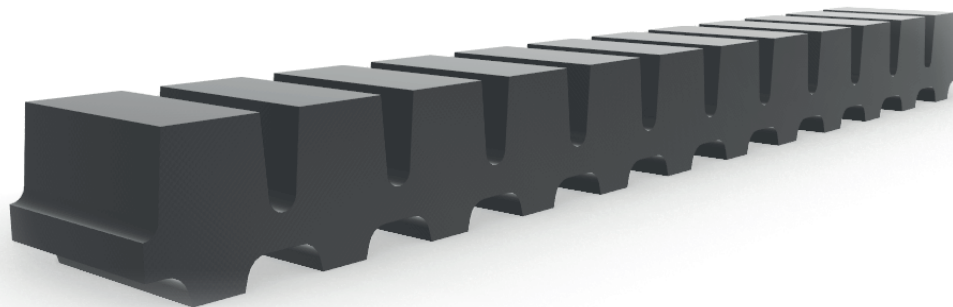

RUBBER COVER TYPE	HARDNESS Sh.A	BREAKING STRENGTH N/mm ²	ELONG. AT BREAK %	ABRASION mm ³ (DIN 53516)
NR 65 BL	65 ± 5	≥ 16	≥ 500	110 ± 10
NR 75 BL	75 ± 5	≥ 17	≥ 400	90 ± 10
NR 70 FQ	70 ± 5	≥ 21	≥ 500	90 ± 10

RUBBER CODE	DESCRIPTION	COLOR	BASIC POLYMER
NR-BL	Wear Resistant Rubber	Black	Natural Rubber
NR-FQ	Food quality Rubber	White	Natural Rubber

TENSILE CORE	BREAKING STRENGTH N/mm	ELONG. AT BREAK %	MAX WORKING LOAD daN/cm	ELONG. AT MAX WORKING LOAD
CTK 1500 (endless)	≥ 1500	≥ 5	300	1,5%
Vulcanized joint breaking strength about 50% of the nominal endless value				

CARCASS	FIBER (Warp)	FIBER (Weft)	STRUCTURE	FEATURES
CTK	Aramidic	Cotton	Cord	Tension Member
TT	Polyester	Polyester	Textile	Breaker

DIMENSION	WIDTH	THICKNESS	PITCH	LENGTH
ENDLESS	50	36	33	up to 18 mt
VULCANIZED JOINT	50	36	33	from 18 mt

